


## CRPF2130WD

### Cold Room

#### Product Features

- 850 mm wide door for euro pallet access
- Plug-In - ready after assembly
- Easy access to products
- Easy assembly
- Interlocking connection system
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- Door position is fixed
- Shelves available as accessory
- Ramp available as accessory for easy access

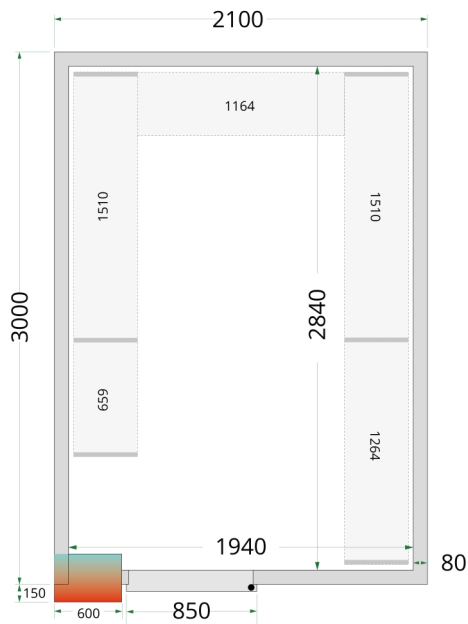

Strong handle



Shelf as accessory

### Cold room with 850 mm wide door

Cold rooms are perfect as plug-in with quick and easy assemble. The cooling unit comes completely pre-mounted in a panel and does not require extra expert knowledge. This model has a 850 mm wide door, allowing easy access with a euro pallet.

The cold room can be used in both restaurants, delis, cafes etc. They are a great way to create optimal and efficient cooling space at a very affordable price. Cold rooms are a perfect and easy accessible way to store foods, dairy products and beverages.

The many different cold room sizes give a good fit in most conditions. Cold rooms are available as both cooler and freezer models. Shelves are optional. A ramp is also available as an option to provide easy access with lightweight trolleys and bakery racks (the cold room is not suitable for pallet jacks/pallet trucks).

Our range of cold rooms have a low energy consumption due to the effective polyurethane insulation in the panels combined with an energy efficient cooling system.

Not suitable for outdoor use.

Design and Material		Measures and Content		Power and Consumption	
Door No & Type	1 hinged solid door	Internal Volume	m <sup>3</sup> 11.24	Energy Consumption	kWh/24h 23.4
Max Load on Floor	kg/m <sup>2</sup> 1500	Wall Thickness	mm 80	Annual Energy Cons.	kWh/year 8541
Exterior Finish	White	Insulation Density	kg/m <sup>3</sup> 42	Input Power	W 910
Interior Finish	White	Temperature Range	°C 0 to +8	Voltage / Frequency	V/Hz 220-240/50
Interior Light	LED	Climate Class	5	Noise Level	dB(A) 60
Lock	Yes	Gross / Net Weight	kg 561 / 531		
		Gross / Net Volume	l		
		Cooling and Functions		Dimensions	
		Type of Controller	Electronic	Internal Dimension (WxDxH)	mm 1940 x 2840 x 2040
				External Dimension (WxDxH)	mm 2100 x 3000 x 2200

Measures and Content		
Type of Cooling		Ventilated
Type of Defrost		Automatic, hot gas
Refrigerant		R290
Refrigerant Charge	g	170
Thermometer		Yes

Power and Consumption			
Packed Dimension (WxDxH)	mm	1900 x 2200 x 1150	
40ft Container Load	pcs	10	