


## CR 210x270x220

Cold Room Panels 80 mm

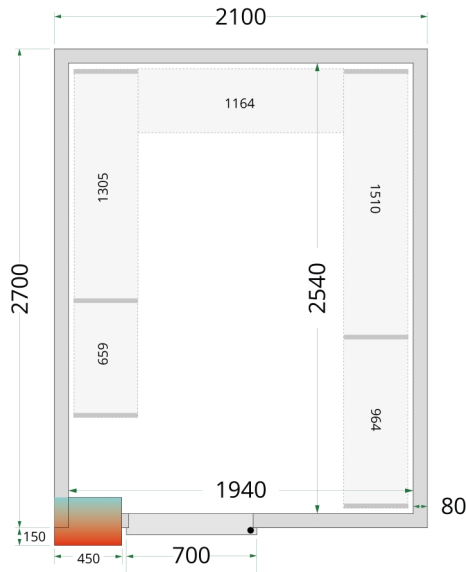

### Product Features

- Only panels - without cooling unit
- Interlocking connection system
- 80 mm panel insulation
- Many customisation possibilities
- Easy access to products
- Easy assembly
- Anti-slip floor in SS304 stainless steel
- Shelves available as accessory
- Ramp available as accessory for easy access



Strong handle



Lock system

### Cold room panels with 80 mm insulation

TEFCOLDS cold room panels are quick to assemble with an easy interlocking system. The interchangeable modular panels allow different positioning of the door, so you can build the room to fit your space. Cold rooms offer an efficient and affordable solution to chilled bulk storage, and are often used in restaurants, delis, cafes, and in the storage rooms of shops and supermarkets.

Our range of cold room panels are equipped with an effective polyurethane insulation. Combine the panels with one of our energy efficient monoblock refrigeration units for high cooling performance and low energy consumption.

In terms of accessories, you have the option of a ramp to provide easy access with lightweight trolleys and bakery racks (the room is not suitable for pallet jacks/pallet trucks). We also offer shelf rack system kits for optimizing storage space. We also offer cold room panels with a wide door (see WD models). The panels are not suitable for outdoor use.

Design and Material		Measures and Content		Power and Consumption	
Door No & Type	1 hinged solid door	Internal Volume	m <sup>3</sup> 10.05	Energy Consumption	kWh/24h 0
Max Load on Floor	kg/m <sup>2</sup> 1500	Wall Thickness	mm 80	Annual Energy Cons.	kWh/year 0
Exterior Finish	White	Insulation Density	kg/m <sup>3</sup> 42	<b>Dimensions</b>	
Interior Finish	White	Gross / Net Weight	kg 495 / 465		
Lock	Yes	Gross / Net Volume	l	Internal Dimension (WxDxH)	mm 1940 x 2540 x 2040
		<b>Cooling and Functions</b>		External Dimension (WxDxH)	mm 2100 x 2700 x 2200
		41839		Packed Dimension (WxDxH)	mm 2180 x 1560 x 1240
				40ft Container Load	pcs 12