


## CRNF1527

Freezer room

### Product Features

- Plug-In - ready after assembly
- Many customisation possibilities
- Easy access to products
- Freezing unit
- Easy assembly
- 120 mm panel insulation
- Anti-slip floor in SS304 stainless steel
- Alarm kit as accessory
- Shelves available as accessory
- Ramp available as accessory for easy access

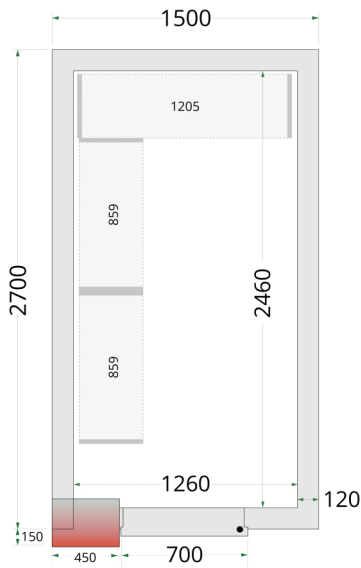

Strong handle



Shelf as accessory

### Easy, economic and effective storage in freezer room

TEFCOLD freezer rooms are a perfect plug-in solution with quick and easy assemble.

The cooling unit comes completely pre-mounted on a panel and does not require extra expert knowledge. The interchangeable modular panels allow different positioning of both the cooling unit and the panel with the door.

The freezer room can be used in both restaurants, delis, cafes etc. They are a great way to create optimal and efficient cooling space at a very affordable price.

We offer a selection of sizes to fit most situations. The rooms are available as both cooler and freezer options and shelving is available as an option. A ramp is also available as an option to provide easy access with lightweight trolleys and bakery racks (the freezer room is not suitable for pallet jacks/pallet trucks).

Our range of cold rooms and freezer rooms have a low energy consumption due to the effective polyurethane insulation in the panels combined with an energy efficient cooling system.

Not suitable for outdoor use.

Design and Material		Measures and Content		Power and Consumption	
Door No & Type	1 hinged solid door W:700 H:1765	Internal Volume	m <sup>3</sup> 6.08	Energy Consumption	kWh/24h 27.02
Max Load on Floor	kg/m <sup>2</sup> 2000	Wall Thickness	mm 120	Annual Energy Cons.	kWh/year 9864
Exterior Finish	White	Insulation Density	kg/m <sup>3</sup> 42	Input Power	W 1510
Interior Finish	White	Temperature Range	°C -20 to -10	Voltage / Frequency	V/Hz 220-240/50
Interior Light	LED	Climate Class	5	Noise Level	dB(A) 60
Lock	Yes	Gross / Net Weight	kg 415 / 385	<b>Dimensions</b>	
		Gross / Net Volume	l	Internal Dimension	mm 1260 x 2460 x 1960 (WxDxH)
		<b>Cooling and Functions</b>			

Measures and Content		
Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic, hot gas
Refrigerant		R290
Refrigerant Charge	g	150
Thermometer		Yes

Power and Consumption			
External Dimension (WxDxH)	mm	1500 x 2700 x 2200	
Packed Dimension (WxDxH)	mm	2200 x 1900 x 2400	
40ft Container Load	pcs		10